



SD 302-21



The SD Series is equipped with a patented U 2000 Drying Unit. It is engineered for medium to long-term constant low humidity storage of 1% RH.

Humidity, temperature & alarm functions are shown and can be adjusted on a digital display.

The circulation of air in the cabinet is regulated through an internal fan.

All surfaces are ESD coated in conformity with current ESD 61340-5-1 standard.

The SD-302-21 is ideal for the moisture-proof and anti-oxidation storage of wide-ranging technologies and conforms with IPC/JEDEC J- STD 033C & IPC-1601.



Features

- **Accuracy of sensor RH% & T°C**
- **Lockable doors**
- **ESD safe design**
- **Shelves**
- **Door alarm**
- **Dry unit**
- **ESD bonding point**
- **21 series digital panel**
- **Pre mounted holes**
- **Power supply**
- +/- 3% RH, +/-0.3 °C
- 2 doors locked with key
- Norm (IEC 61340-5-1)
- ESD metal painted body (10⁶ Ohm/sq).
- Dissipative glazing (inside and outside 10⁸ Ohm/sq)
- 7 height adjustable chrome steel shelves
- Door is equipped with a switch which triggers the humidity or door alarm if the preset value is exceeded.
- U 2000 Dry Unit.
- ESD wristband can be connected with the cabinet
- Very convenient settings of RH%, temperature, alarm and calibration functions.
- For nitrogen unit & heater
- 5 meter cable with IEC plug

Benefits

- **Maintenance**
- **Highly energy sufficient**
- **Option availability**
- **Recoverytime after dooropening**
- **Adjustable legs**
- **Datalogging**
- **Temperature**
- **IPC**
- The drying unit is maintenance free
- Average power consumption 35 W/h.
- N2 Auto Flow, heating, SMD reel racks, etc.
- <15 min to below 1%. (after 1 door opening)
- For levelling out.
- Through network with software.
- Maximum 40 °C (optional)
- According to IPC/JEDEC J- STD 033C & IPC-1601.



Technical Data Cabinet

- External dimensions: (W x H x D) 500 x 1227 x 640 mm
- Internal dimensions: (W x H x D) 490 x 1124 x 602(594) mm
- Weight: 68 kg
- Max weight on shelf: 30 kg
- Max. loading capacity: 100 kg
- Body: Steel, conductive coated 10^6 - 10^8 Ω /sq
- Shelves (W x D): 4 pcs long, 468 x 510 mm adjustable.
3 pcs short, 468 x 468 mm adjustable.
- Volume: 320 L
- Voltage: 230 V AC (120 V AC optional)
- Power consumption: 35 W/h
- Protection class: Hard grounded, Class 1
- Humidity level cabinet: Drying 1% RH *

*(dependent upon frequency of door openings)

Technical Data Dry Unit U-2000

- Control: Adjustable with 21 series control panel
- Voltage level: 230 V/50 Hz. (optional 120 V/60 Hz)
- Power consumption: 35 W/h
- Dimensions: W x L X D = 260 mm x 380 mm x 100 mm
- Weight: 8.1 kg.

Technical Data 21 Display

Settings:

- Nominal humidity value
- Nominal humidity value alarm (light)
- Time delay humidity alarm
- Nominal temperature value
- Door alarm buzzer
- Offset possibilities



Technical Data N² (Auto) Flow


- Power supply: 230 V AC (110 V AC optional)
- N² Connection: 8 mm hose connection
- N² Pressure: 1 – 6 bar
- N² Standby- amount: 0 – 25 L/min
- N² Purge: 0 – 25 L/min

Technical Data Heater SH 230-1

- Voltage: 230 V AC (110 V AC optional)
- Frequency AC: 50/60 Hz
- Power: 530 W
- Temperature sensor: PTC 100
- Thermal protection: 90 °C
- Temperature range: 30 – 40 °C
- Air Flow: 86 M³/H
- Display tolerance: 1 digit at 25 °C



Performance

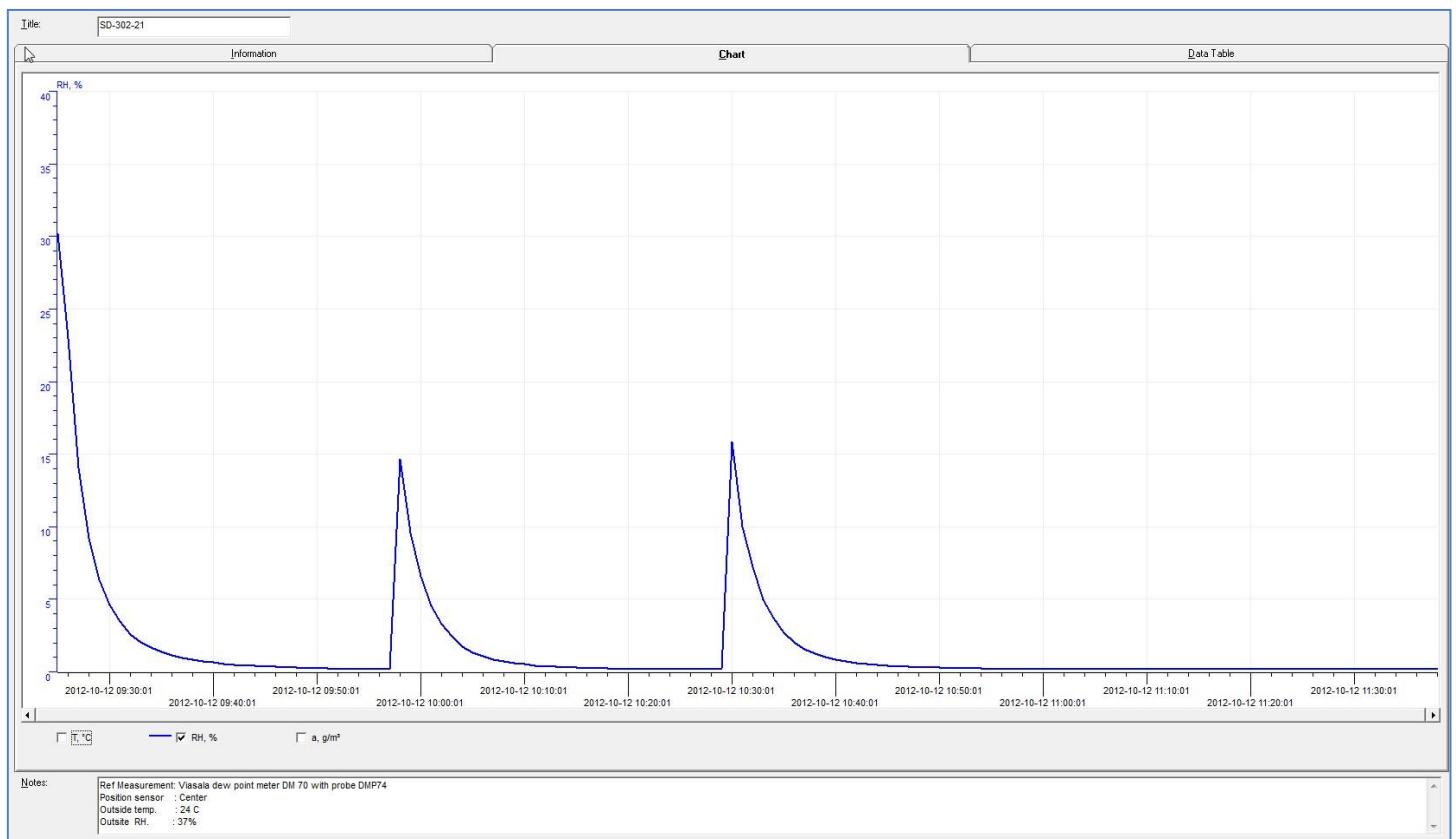

Test conditions




Instrument:
 Type of dew point sensor:
 Accuracy of dew point sensor:
 Location of sensor:
 Ambient conditions:
 Door openings:

Vaisala.
 Vaisala drycap 180M
 $\pm 0.2^{\circ} \text{C}$ at $+ 20^{\circ} \text{C}$ ($+ 68^{\circ} \text{F}$)
 In the direct surrounding of cabinet sensor
 Humidity $50 \pm 5\% \text{ rH}$, $25^{\circ} \pm 2^{\circ} \text{C}$, Pressure $994 \pm 20 \text{ hPa}$.
 2 door openings, 15 sec. (average RH 0.70%)



Technical Drawings

SD 302-21

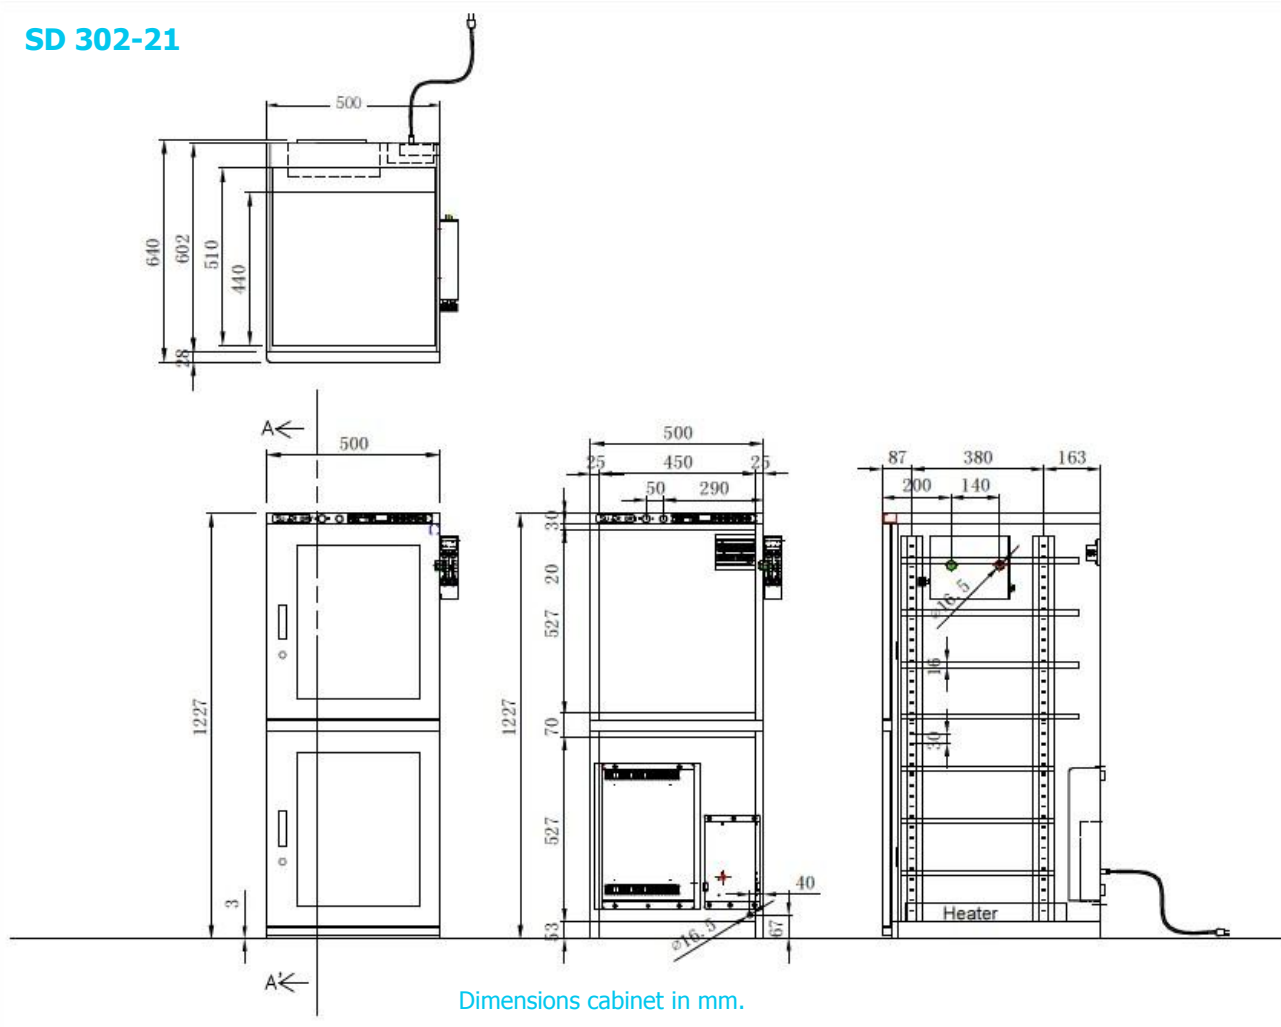

Number of shelves top section	1	2	3	4
Distance (in mm) between shelves if equally spaced (if bottom shelf is mounted on the lowest possible position in the section)	x	250	160	125
Remaining space between top shelf and top beam	495	245	160	105
Remaining space between bottom shelf and bottom cabinet (if bottom shelf is mounted on the lowest possible position in the section)	0	0	0	0
Loading capacity shelves m ² (468 mm x 510 mm)	0,24	0,48	0,71	0,95
Number of shelves bottom section	1	2	3	
Distance (in mm) between shelves if equally spaced in bottom section	x	165	103	x
Remaining space between top shelf and top beam	295	155	120	x
Remaining space between bottom shelf and bottom cabinet	265	175	145	x
Loading capacity shelves m ² (468 mm x 468 mm)	0,22	0,44	0,66	x
Shelves are adjustable every (mm)	30	30	30	30

Measurements can slightly deviate




Totech Europe BV
De Linge 28
NL-8253 PJ Dronten
www.totech.eu.com

Phone: +31 (0) 321 330239
Fax: +31 (0) 321 330254
K.v.K: Lelystad 390 86417
E-Mail: info@totech.eu.com


V.A.T.: NL813341887B01
IBAN :NL83Rabo0145683443
B.I.C./Swift: RaboNL2U
Bank: 1456.83.443



Technical Drawings

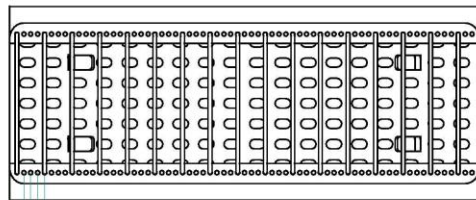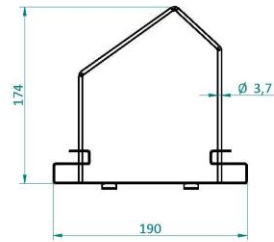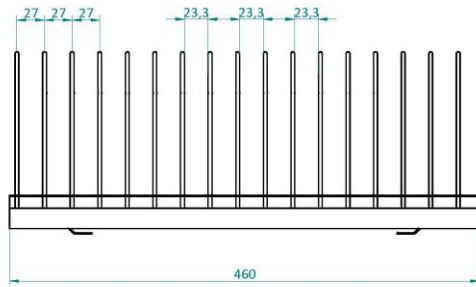

Dimensions of the SMD Reel Rack, item number 20014000

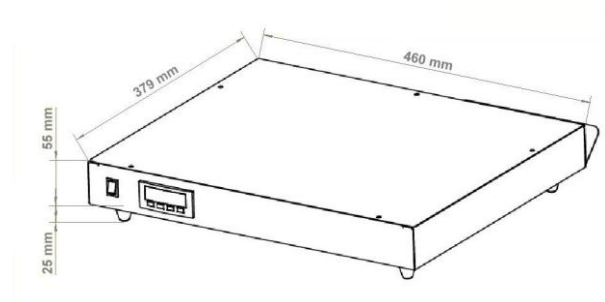

Dimensions of the heater SH 230-1, item number 21001300



Options



N2 Auto Flow System

The Auto Flow System is developed for use in combination with a Totech drying cabinet. The device is used for the quick removal of moisture in the cabinet after the doors have been opened. The drying process is realized by using nitrogen (N²), which is added automatically after the doors have been closed (by means of adjustable timer function)

Item number 22613001



N2 Flow System 10-100

The N2 Flow System is developed for use in combination with a Totech drying cabinet. The device is used for the quick removal of moisture in the cabinet. The drying process is realized by using nitrogen (N²). Adjustable 10 – 100 L/min

Item number 20010020



SMD Reel Rack

460 mm length, and mountable on shelf.

Item number 20014000

SMD Reel supports

Reel support for 20014000

Item number 20014200



Humidity calibrator Hygropalm 22

Precision measuring device for calibrating sensors

Set includes Hygroclip sensor, case and cable

Item number 20001019

Hygropalm only

Item number 20001016



Heater SH 230-1

40°C heater

Item number 21001300



Humidity alarm light - Red or Orange

Item number 20016033



Options




Shelf

Chrome steel shelf, short

Item number 20030210

Brackets 4 pcs, item number 30003010

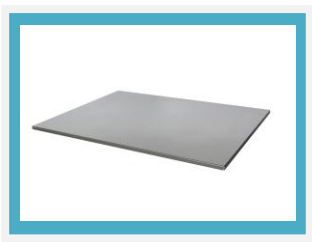

Shelf

Chrome steel shelf, long

Item number 20030202

Brackets 4 pcs, item number 30003010



Set spare parts SD cabinet


Set includes the main spare parts for the SD cabinet: U-2000 Dry Unit, main PCB and power supply

Item number 30006099

Exchange set spare parts SD cabinet,

Same set as above, but now as exchange.

Item number 30006096

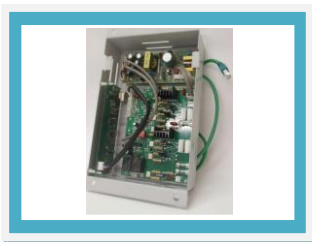

SD network PCB incl. software,

Item number 20024220

