



LABESTAT A100 PERMANENT DISSIPATIVE TUBING


ATTENTION: the adhesive packing tape don't get a good sticking on the surface of the dissipative film

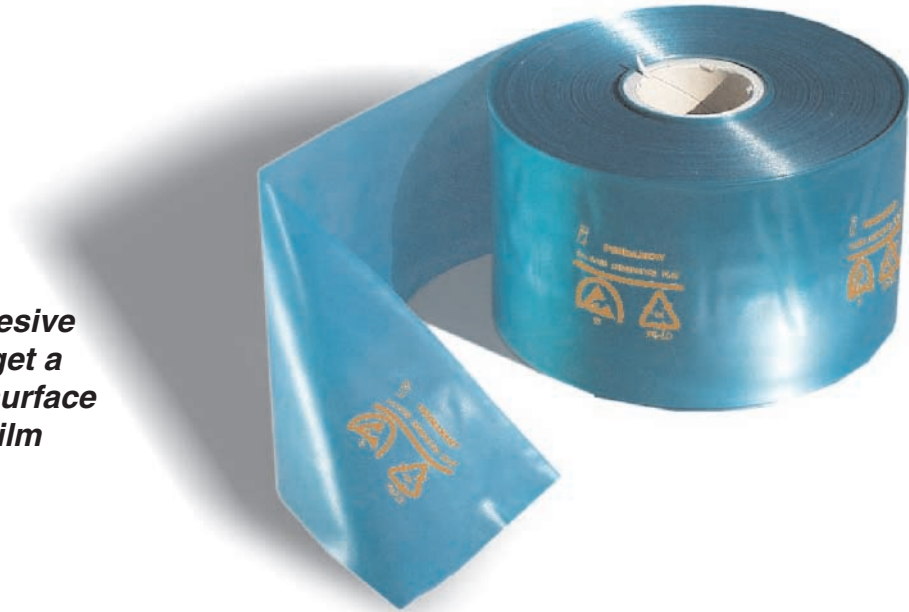

Film:	Dissipative polyethylene
Colour	transparent GREEN
Thickness:	100µm ±10%
Amines:	free
Recyclable:	
Sealing:	200°C - 0.5-4sec 40-50psi
Rs:	10 ¹⁰ -10 ¹¹ Ω
Decay time from 1000V to 100V:	< 2 sec
Charge generation:	NO
Life :	2 years minimum

NOTE : accordingly to the IEC 61340-5-1 Standard, this kind of material is classified as "Proximity packaging" , suitable to package "Non sensitive devices", to be introduced in ESD protected areas.

MARKING

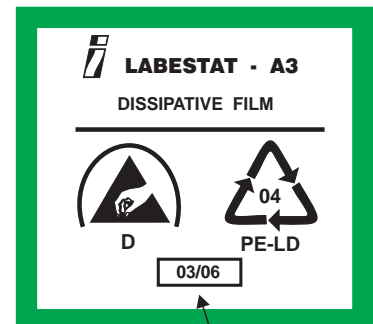

production batch

6604.239	Green DISSIPATIVE 100µm - 75mm width - 250m roll
6604.240	Green DISSIPATIVE 100µm - 100mm width - 250m roll
6604.244	Green DISSIPATIVE 100µm - 150mm width - 250m roll
6604.248	Green DISSIPATIVE 100µm - 200mm width - 250m roll
6604.254	Green DISSIPATIVE 100µm - 250mm width - 250m roll
6604.258	Green DISSIPATIVE 100µm - 300mm width - 250m roll
6604.260	Green DISSIPATIVE 100µm - 400mm width - 250m roll