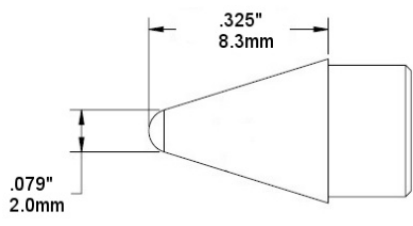
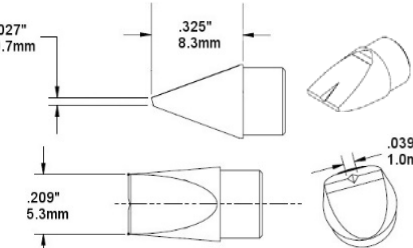
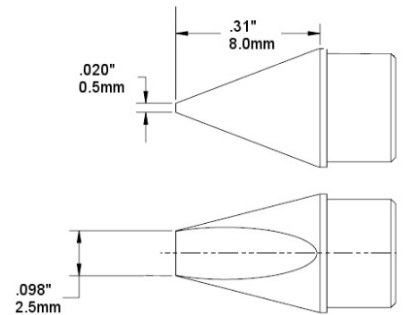
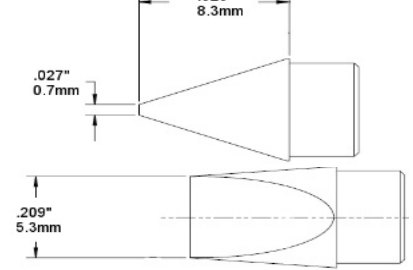


HTC Cartridges are compatible with MX-500, MX-5000 and MX-5200 Systems –MX-H6-HTD Hand pieces

Temperature	HTC	Application
412 °C	HTC-7xx	Most Standard Ceramic and High Thermal Demand
468 °C	HTC-8xx	
510 °C	HTC-9xx	

Please note the above temperatures are the maximum temperatures of the heater. The idle temperature is dependent on the geometry of the cartridge (up to 15°C lower.)

HTC		
	<p>HTC-7CN0020S</p> <p>HTC-8CN0020S</p> <p>HTC-9CN0020S</p>	<p>Conical</p> <p>2mm x 8.3mm (.079" x .325")</p>
	<p>HTC-7VC0053S</p> <p>HTC-8VC0053S</p> <p>HTC-9VC0053S</p>	<p>V-Groove Chisel 40°</p> <p>5.3mm x 8.3mm (.209" x .325")</p>
	<p>HTC-7CH0025S</p> <p>HTC-8CH0025S</p> <p>HTC-9CH0025S</p>	<p>Chisel 40°</p> <p>2.5mm x 8mm (.098" x .31")</p>
	<p>HTC-7CH0053S</p> <p>HTC-8CH0053S</p> <p>HTC-9CH0053S</p>	<p>Chisel 40°</p> <p>5.3mm x 8.3mm (.209" x .325")</p>