

LFS-UFP-T4-ZQ Non Refrigeration

**Halogen Free Ultra Life Paste
SAC 305 (Sn96.5/Ag3.0/Cu0.5)**

DESCRIPTION

ZQ has been formulated to provide increased stability at room temperatures whilst maintaining excellent printing and wetting properties.

ZQ gives bright, smooth and shiny void free solder joints with low, clear, post process residues that make for reliable pin probe testing.

ZQ is particularly suitable for fine pitch printing due to reduced particle size.

BENEFITS

- Does not require refrigeration
- Prints down to at least 0.2mm
- Decreased "head-in-pillow" problem
- Constant viscosity during 3 days continuous printing
- Constant viscosity during storage for 30 days up to 50°C
- Superior wetting and spreading characteristics
- Reduces or eliminates voiding, particularly under BGA's
- High resistance to slumping
- High humidity resistance
- High resistance to solder balling
- Extended stencil life
- 3 - 5 day tack time

Typical specification and test results

	Specification
Alloy	96.5Sn, 3.0Ag, 0.5Cu
Flux type and content	11.8% RMA
Particle size	T4 20-38 Micron T5 10-25 Micron
Alloy melting temp	216-221°C
Viscosity	180
Tensile Strength (MPa)	37
Elongation	33%
Wetting time	1.58 sec
Silver Chromate Test	No discolouration
Insulation resistance	Pass
Electromigration	Pass
J-STD-004	ROL0

APPLICATION

If the product has been refrigerated allow to warm up to room temperature (at least 8 hours) if using for the first time. Stir with a spatula for at least 30 seconds to ensure homogenisation of paste. Apply sufficient paste to stencil to allow a smooth even roll. A bead diameter of 1/2 to 5/8 inch is normally sufficient. Squeegees should be set at 60° for highest print definition. Pressure should be around about 0.28-0.33Kg/sq cm, print speed 20-150mm/sec with 0.0mm snap-off distance (on contact).

Do not store new and used paste in the same container. Once a pot of paste has been opened, replace the internal plug, re-seal and store in a cool place out of direct sunlight. Do not return to fridge Paste that has not been opened may be kept in a refrigerator for at least 12 months.

Paste can be stored at up to 50°C for 30 days without affecting viscosity.

This paste does not require refrigerated storage, however can be stored in a fridge if you prefer.

REFLOW


The **ZQ** paste can be reflowed using any of the two most commonly used profile types i.e RSS (Ramp-Soak-Spike) and RTS (Ramp-To-Spike). Please refer to Reflow Profile on page 2.

EQUIPMENT AND CIRCUIT CLEANING

BLT manufactures a range of aqueous and solvent cleaning equipment for stencils and misprinted boards. SCS/1 and SCS/2 are particularly recommended for use with LED-3 series solder pastes.

Post cleaning is not necessary for **ZQ**, but however, should cleaning be necessary, Vigon N640 or Vigon US are recommended.




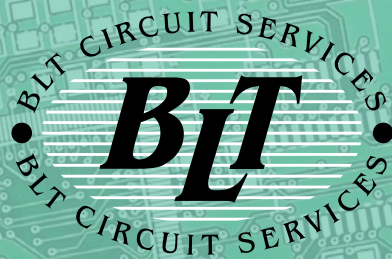


LFS-UFP-T4-ZQ Non Refrigeration

*Halogen Free Ultra Life Paste
SAC 305 (Sn96.5/Ag3.0/Cu0.5)*


TYPICAL X-RAY EXAMPLES

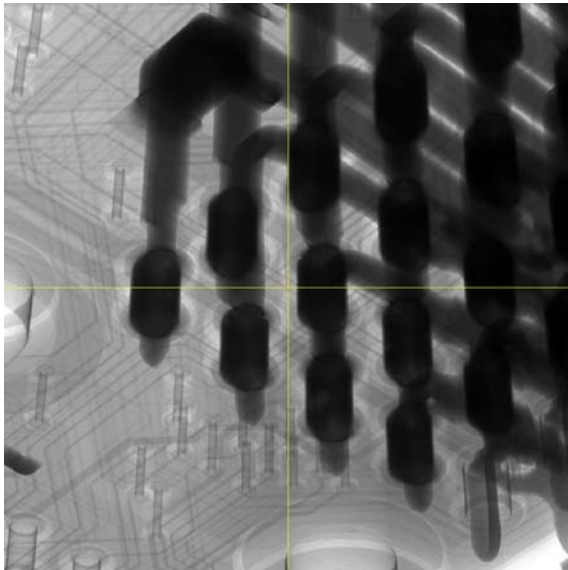


Pin In-Hole

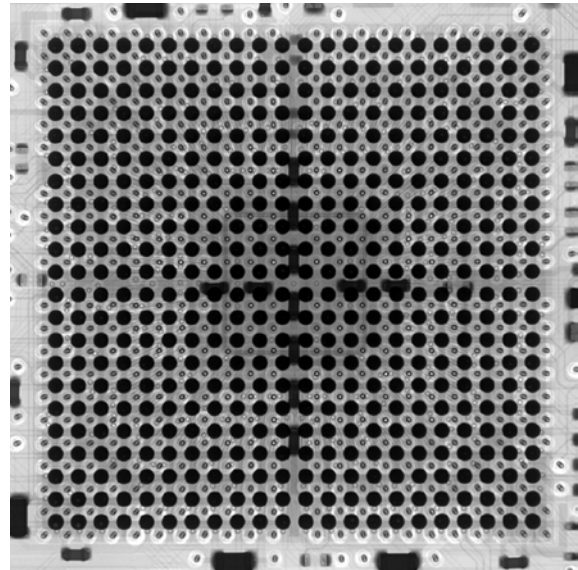


Micro-BGA

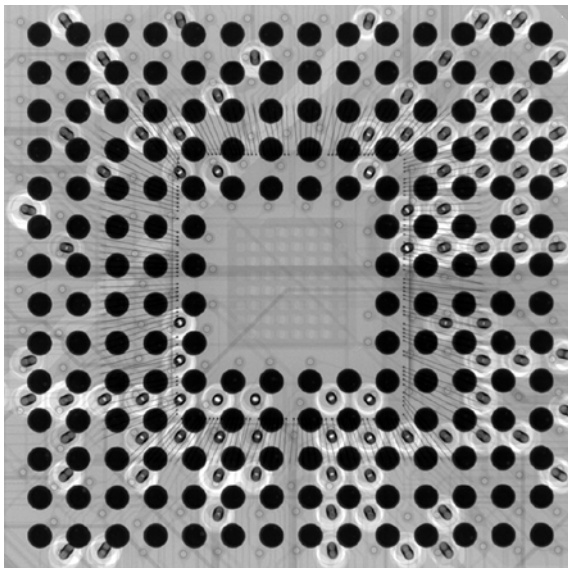

BGA

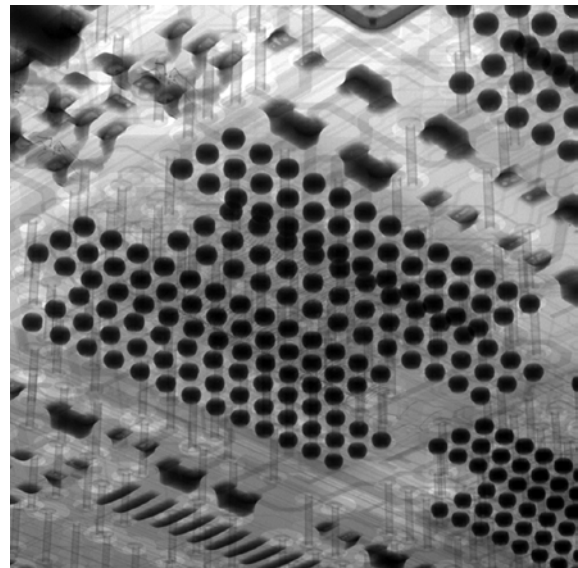

3D SMD Devices


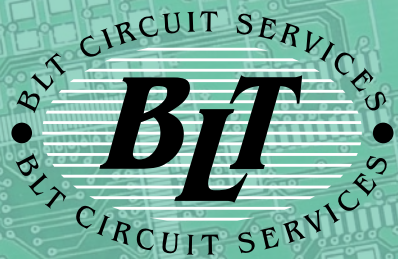


LFS-UFP-T4-ZQ Non Refrigeration

**Halogen Free Ultra Life Paste
SAC 305 (Sn96.5/Ag3.0/Cu0.5)**

SUPPORT DATA & TEST RESULTS

Printability

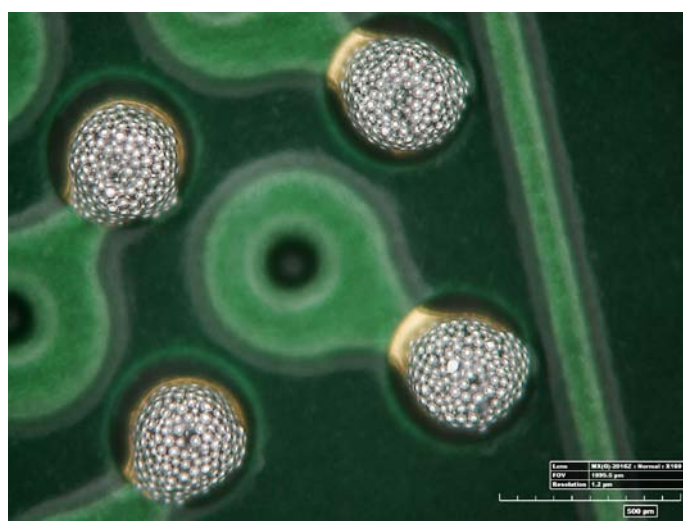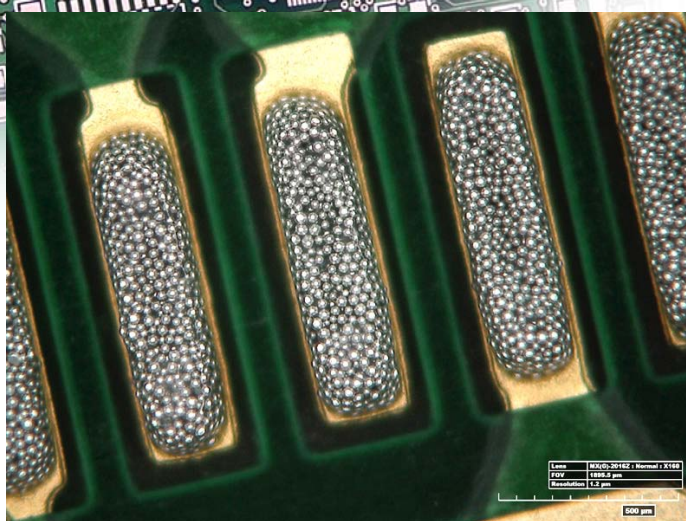

Type 4 Solder Spheres 20-38 microns giving excellent printing definition.

Recommended Reflow Profile

Typical Profile length 3-4.5 minutes

Initial heating rate 1-4°C

Soak time from 150-180°C 60-90 secs or 60-120 seconds if

using a faster initial heating rate to 170°C Ramp

From 180°C to peak 2-3°C per second

Time above 220° C 30-90 seconds

Peak temp 240-260°C *To accommodate higher peak*


component profiles e.g. some BGAs and LEDs

Cool down 2-5°C per second

*Please find two examples of a typical RSS and RTS with the
ZQ paste on the following 2 pages.*

Warranty

All reasonable endeavours have been made to ensure that the information contained in this data sheet is accurate, but it is submitted on the express condition that BLT Circuit Services Ltd. shall be under no liability whatsoever in respect thereof or for any loss, injury, damage or liability of whatsoever nature arising, suffered or incurred as a consequence of its use.




BLT Circuit Services Ltd
Brome Industrial Estate,
Brome, Eye, Suffolk,
IP23 7HN England

Telephone +44 (0)1379 870870

Fax +44 (0)1379 870970

Email sales@blt.keme.co.uk



Web www.bltcircuitservices.co.uk

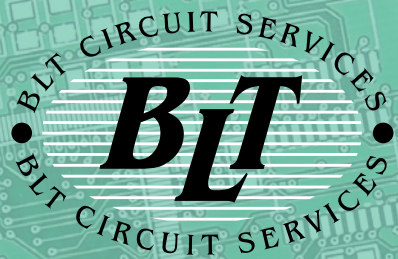

LFS-UFP-T4-ZQ Non Refrigeration

Halogen Free Ultra Life Paste
SAC 305 (Sn96.5/Ag3.0/Cu0.5)


RAMP SOAK SPIKE DATA

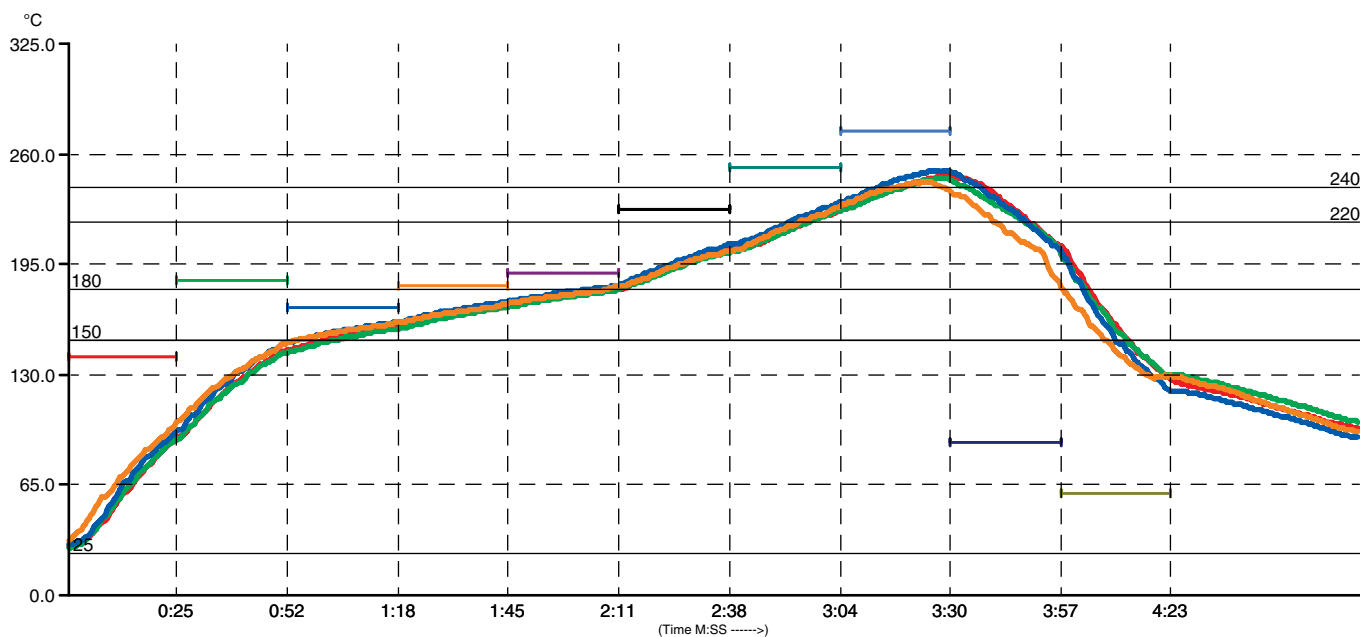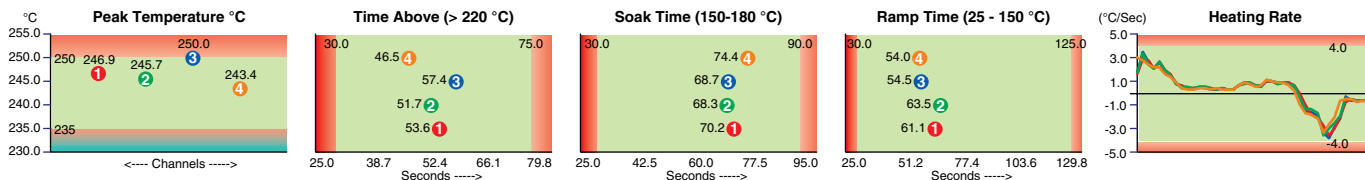

Process Parameters		
Solder Type: BLT ZQ Solderpaste		
	Min	Max
Soak Time (150-180°C)	30 seconds	90 seconds
Time Above (t>220°C)	30 seconds	90 seconds
Peak Temperature	240°C	260°C

Zone Setpoints (Machine: : Soltec quantis) Recipe: Ramp Soak Spike										
95.00 cm/min (N2)	Z1	Z2	Z3	Z4	Z5	Z6	Z7	Z8	Z9	10
Top Heater (°C)	140	186	170	182	190	227	252	273	90	60
Bottom Heater (°C)	140	186	170	182	190	227	252	273	90	60



Channel	Process Data									Zone Slopes (°C/Sec)											
	Peak	25-150	t=150	t=180	150-180	t=220	t>220	t>240	t=Peak	Z1	Z2	Z3	Z4	Z5	Z6	Z7	Z8	Z9	Z10	Max+	Max-
1	246.9	61.1	61.1	131.3	70.2	176.8	53.6	20.0	3:29.0	2.9	2.2	0.5	0.5	0.3	1.0	1.0	0.9	-2.1	-3.7	2.9	-3.7
2	245.7	63.5	63.5	131.8	68.3	177.8	51.7	15.0	3:29.0	3.3	2.4	0.6	0.5	0.5	0.9	1.0	0.9	-2.7	-3.7	3.3	-3.7
3	250.0	54.5	54.5	123.2	68.7	172.1	57.4	25.0	3:29.0	3.5	2.5	0.5	0.5	0.5	1.0	1.1	0.9	-2.5	-4.2	3.5	-4.2
4	243.4	54.0	54.0	128.5	74.4	175.4	46.5	11.0	3:24.6	3.0	2.2	0.5	0.4	0.6	0.9	1.0	-1.0	-3.8	-3.1	3.0	-3.8
Delta	6.6	9.5	9.5	8.6	6.1	5.7	10.9	14.0	14.0	0.6	0.3	0.1	0.1	0.3	0.1	0.1	1.9	1.7	1.1	0.6	0.5
Mean	246.50	58.27	58.27	128.70	70.40	175.53	52.30	17.75	17.75	3.17	2.33	0.53	0.47	0.47	0.95	1.02	0.43	-2.78	-3.68	3.17	-3.85

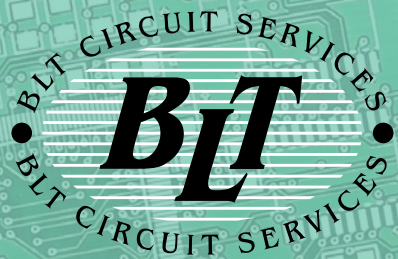

LFS-UFP-T4-ZQ Non Refrigeration

Halogen Free Ultra Life Paste
SAC 305 (Sn96.5/Ag3.0/Cu0.5)

RAMP TO SPIKE DATA

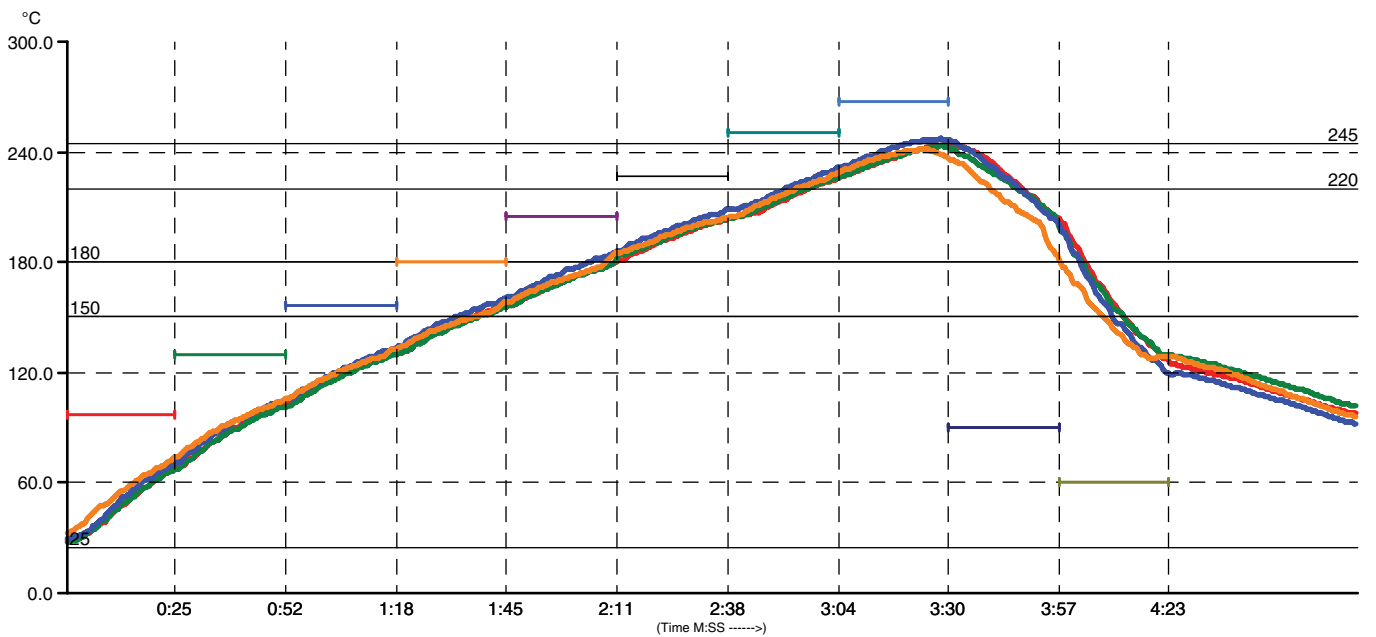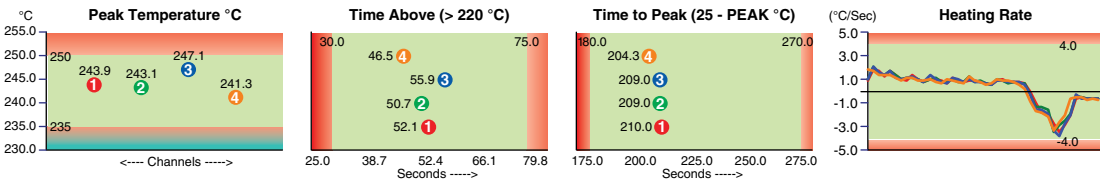

Process Parameters		
Solder Type: BLT LED 3 Solderpaste		
	Min	Max
Soak Time (150-180°C)	40 seconds	90 seconds
Time Above (t>220°C)	30 seconds	90 seconds
Peak Temperature	240°C	260°C

Zone Setpoints (Machine: : Soltec quantis) Recipe: Ramp To Spike										
95.00 cm/min (N2)	Z1	Z2	Z3	Z4	Z5	Z6	Z7	Z8	Z9	10
Top Heater (°C)	97	130	156	180	205	227	250	267	90	60
Bottom Heater (°C)	97	130	156	180	205	227	250	267	90	60

Process Data										Zone Slopes (°C/Sec)											
Channel	Peak	25-150	t=150	t=180	150-180	t=220	t>220	t>245	t=Peak	Z1	Z2	Z3	Z4	Z5	Z6	Z7	Z8	Z9	Z10	Max+	Max-
1	243.9	210.0	97.2	131.3	34.1	177.3	52.1	0.0	3:29.0	1.8	1.5	1.1	1.0	0.9	1.0	1.0	0.8	-2.1	-3.6	1.8	-3.6
2	243.1	209.0	98.6	131.3	32.7	177.3	50.7	0.0	3:29.0	2.0	1.6	1.2	1.2	1.2	1.0	0.9	0.8	-2.7	-3.6	2.0	-3.6
3	247.1	209.0	92.9	125.1	2.2	172.1	55.9	10.0	3:29.0	2.1	1.7	1.2	1.2	1.0	1.0	1.0	0.8	-2.4	-4.1	2.1	-4.1
4	241.3	204.3	97.2	129.4	32.2	174.9	46.5	0.0	3:24.6	1.8	1.5	1.2	1.0	1.3	0.8	0.9	-0.9	-3.8	-3.1	1.8	-3.8
Delta	5.8	5.7	5.7	6.2	1.9	5.2	9.4	10.0	0.0	0.3	0.2	0.1	0.2	0.4	0.2	0.1	1.7	1.7	1.0	0.3	0.5
Mean	243.85	208.07	96.48	129.28	32.80	175.40	51.30	2.50	0.00	1.93	1.58	1.18	1.10	1.10	0.95	0.95	0.38	-2.75	-3.60	1.93	-3.78